


2 x MFS140A – Stabicraft 2260 Ultracab



RPM	KPH	Knts	GPH	LPH	K/L
Idle 700	6.1	3.3	0.6	2.8	2.2
1000	7.0	3.8	0.9	4.2	1.7
1500	9.7	5.2	1.9	8.4	1.2
2000	13.2	7.1	2.7	12.2	1.1
2500	16.5	8.9	4.2	19.0	0.9
3000	21.4	11.6	6.6	29.8	0.7
3500	32.4	17.5	7.6	34.4	0.9
4000	42.5	23.0	9.0	40.6	1.0
4500	48.8	26.4	13.0	58.4	0.8
5000	53.8	29.1	17.9	80.6	0.7
5500	63.6	34.3	19.9	89.4	0.7
5850	68.7	37.1	20.8	93.4	0.7

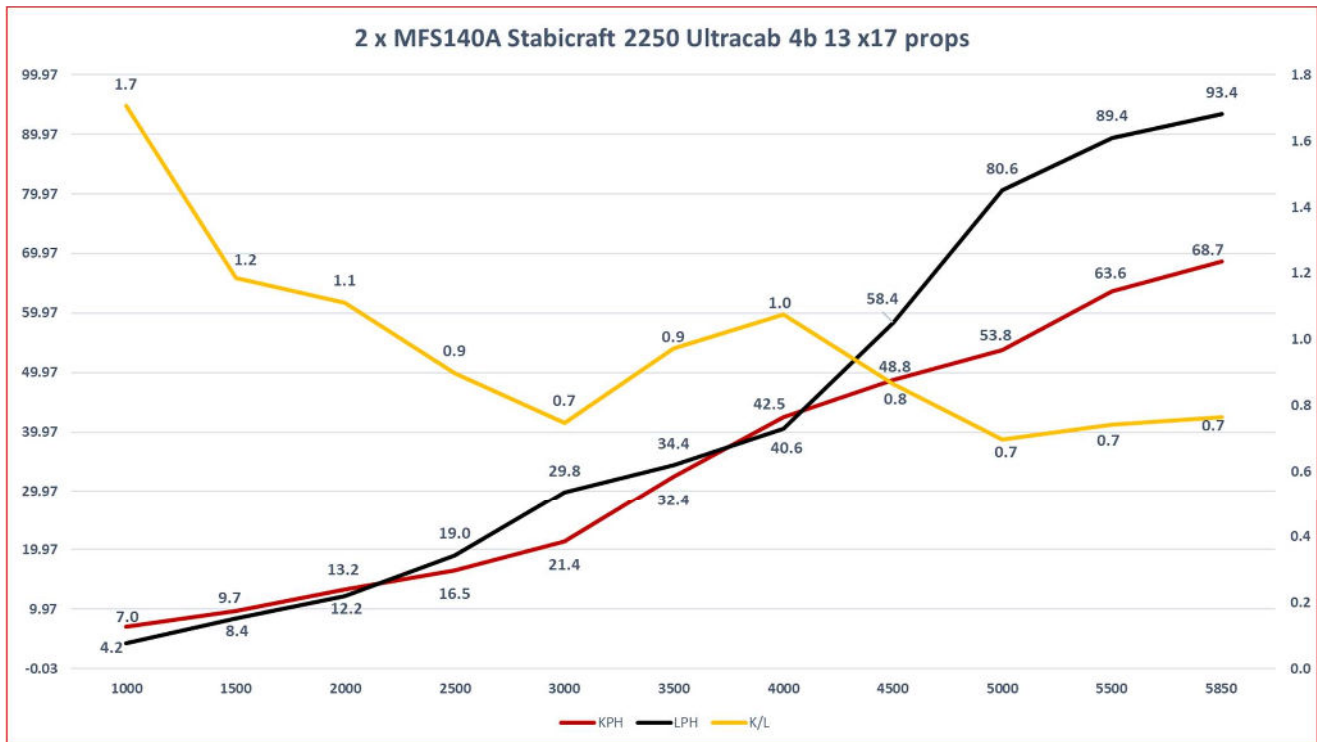

- **2 x MFS140A ET UL**
- **Configuration** 4 cylinder – tuned length exhaust 4-2-1 design
- **Displacement** 1995cc (91.29 cu in)
- **Bore & Stroke** 84 x 90mm (3.31 x 3.54in)
- **Gear Ratio** 2.08:1
- **Propeller pitch** 13 x 17 SS Spitfire 4 Blade
- **Transom height** 25"
- **Fuel** Unleaded petrol (95 octane)
- **RPM Range** 5000 – 5800
- **Alternator** 12V 492W (41A)
- **Weight** 25"183 kg
- **Boat** 6900mm LOA, Beam 2450mm
- **Hull** Aluminium
- **Boat Load** Hull 2000kg + 2 pax = 180kg, fuel, motors, S Gear
- **Weight as tested** 2900kg
- **Fuel Tank** 300 Litres
- **Conditions** Salt Water, Cloudy - 5knts
- **Water Temp** 19 c
- **Air Temp** 18 c / 45% Humidity

