


MFS60A – MAKOCRAFT 481 SUV



RPM	KPH	Knots	LPH	K/L
Idle 850	3.0	1.6	0.6	4.9
1000	4.3	2.3	0.9	4.8
1500	6.1	3.3	1.3	4.7
2000	8.1	4.4	1.8	4.5
2500	10.2	5.5	3.2	3.2
3000	11.9	6.4	4.8	2.5
3500	21.9	11.8	6.2	3.5
4000	30.2	16.3	7.0	4.3
4500	36.5	19.7	9.9	3.7
5000	41.9	22.6	12.7	3.3
5500	47.6	25.7	16.2	2.9
5800	51.9	28.0	18.0	2.9

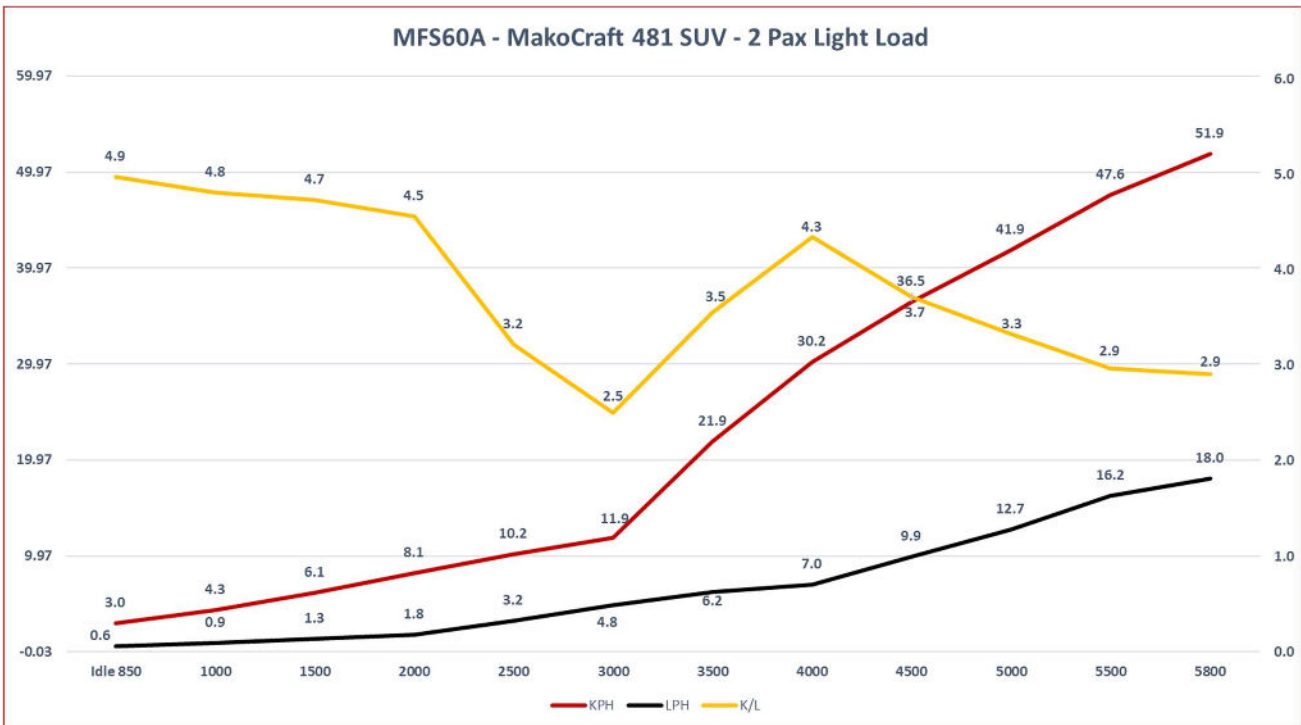

- **MFS60A ET L**
- **Configuration** 3 cylinder – 12 valve, roller rockers
- **Displacement** 866cc (52.8 cu in)
- **Bore & Stroke** 75 x 75mm (2.76 x 2.95in)
- **Gear Ratio** 2.08:1
- **Propeller pitch** 11x14 STD Alloy
- **Transom height** 20"
- **Fuel** Unleaded petrol (87 octane)
- **RPM Range** 5000 – 6000
- **Alternator** 12V 252W (21A)
- **Weight** 20" shaft - 98.5 kg
- **Boat** 4850mm LOA, Beam 2200mm
- **Hull** Alloy - 3mm bottom, 3mm sides
- **Boat Load** Hull 440kg + 2 pax, fuel, motor,
- **Weight as tested** 780kg
- **Fuel Tank** 60L
- **Conditions** Salt Water, Top of tide, 10knts SE
- **Water Temp** 22.8 c
- **Air Temp** 26 c / 71% Humidity

